

magnetPAL™ NO SLAM

THE ORIGINAL PATENTED MAGNETIC DOOR HOLDER AND STOPPER



THE SMALL AND SLEEK SUPER STRONG
MAGNETIC DOOR HOLDER!

FOR NEW AND REPLACEMENT DOOR STOPPER INSTALLATIONS
FOR INDOOR & OUTDOOR USE



NO SLAM BENEFITS



- DESIGNED, TESTED AND MADE OF HIGH QUALITY MATERIALS
- TWO SCREW INSTALLATION
- EXTRA STRONG N48 RARE EARTH MAGNET
- NO CHOKING HAZARDS ONCE INSTALLED
- HELPS PREVENT DOORS FROM CLOSING DUE TO WIND GUSTS
- ELIMINATES "CREEPER" DOORS
- SUITABLE FOR INDOOR & OUTDOOR USE
- SLEEK AND SMALL FOR NEW OR REPLACEMENT INSTALLATIONS
- KEEPS FLOOR AREA CLEAR: NO WEDGES, SHOES, OR ROCKS TO STUB YOUR TOES ON
- HELPS PREVENT DOORS FROM CLOSING ON ANIMALS UNINTENTIONALLY
- MINIMAL METAL FOR REDUCED RUST IN HIGH HUMIDITY AREAS
- OVER 14LBS OF PULL FORCE CREATING A STRONG HOLD
- ADJUSTS TO OVER 85 BASEBOARDS AND DOOR ANGLES FOR MAXIMUM EFFECTIVENESS
- WALL MOUNTABLE (WITH ADDITIONAL HARDWARE)
- EASY TO INSTALL - EASY CLEAN
- FDA APPROVED ABS PLASTIC

US PATENT 15/898,510

magnetPAL.com

© 2017 MAGNETPAL, Hawthorne, CA 90250
800.827.6143 **MADE IN THE USA**



SUPPORTS PASSIVE
COOLING SYSTEMS




magnetPALTM

NO SLAM

THE SMALL AND SLEEK SUPER STRONG
MAGNETIC DOOR HOLDER!

FOR NEW AND REPLACEMENT DOOR STOPPER INSTALLATIONS
FOR INDOOR & OUTDOOR USE

THE ORIGINAL PATENTED MAGNETIC DOOR HOLDER AND STOPPER US PATENT 15/898,510

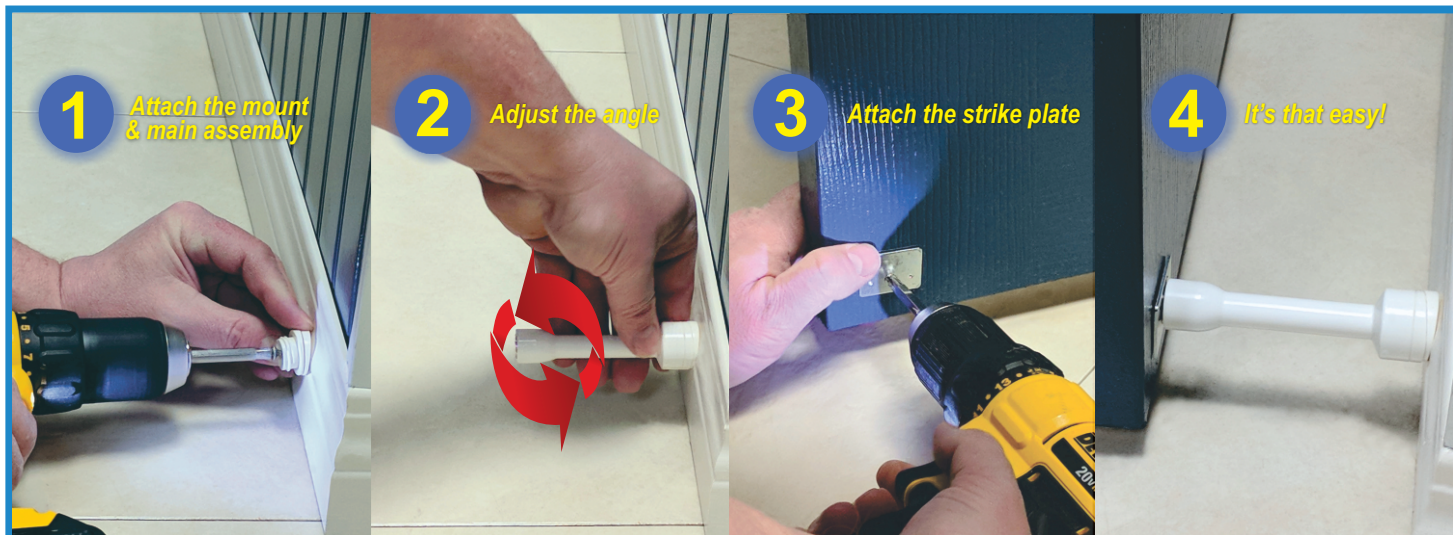

Specifications

■ Taratalac 6000 ABS Resin

Colour - Off-White | Custom Colours Available

Rockwell hardness (23° C) R-scale 107

Mold Shrinkage <= 0.4

Water Absorption <= .03

Tensile strength at break (23° C) 3.175mm 370kg/cm²

FDA Approved 21CFR 181.32

■ Magnet

Neodymium (NaFEB)

12x6mm, N48

Nickel and/or Epoxy Coating

Magnetization direction through round thickness / Length (Axial)

■ Permabond TA4522

Toughened Acrylic Adhesive

ABS 2-3/mm² (290-440psi)

Hardness 70-75 Shore D (ISO 868)

Non-Flammable, Low Odour, Low Viscosity

High Shear & Peel Strength

AVAILABLE IN SINGLE, THREE AND
10 SET CONTRACTOR PACKS

■ Steel Strike Plate

Zinc and/or Epoxy Finish

30mm x 22mm x 1.6mm

Hole Diameter 4.8mm

#5 - 12.5mm screw



■ Spax Multiple Material Screw

Heat treated Grade 5 durability

For use in wood, masonry, sheet metal & plastic

Patented 4CUT point prevents splitting and requires no pre-drilling in wood.

■ Dimensions of NO SLAM™ Body

Length - 8.97cm (3.53 inches) x 14 mm (0.55") round at base

■ Limited LIFETIME WARRANTY

When installed and used as directed. Full details available at www.no-slam.com

SINGLE PACK PART# NS001W - UPC RETAIL PACKAGE 628250496000

3 PACK PART # NS003W - UPC RETAIL PACKAGE 628250496017

10 PACK CONTRACTOR PART # NS010W - UPC RETAIL PACKAGE 628250496024

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

magnetPAL.com

© 2017 MAGNETPAL, Hawthorne, CA 90250

800.827.6143 **MADE IN THE USA**



Keep out of reach of children until installed. Keep away from items affected by magnets e.g. credit cards, magnetic tape, hard drives, pacemakers, etc. Tenir hors de portée des enfants jusqu'à ce qu'ils soient installés. Garder à l'écart des articles affectés par des aimants, par ex. Cartes de crédit, bande magnétique, disques durs, stimulateurs cardiaques, etc.

No Slam™ is a trademark of No Slam Ltd. All rights reserved.